


# Metric Collars (pressure rated)

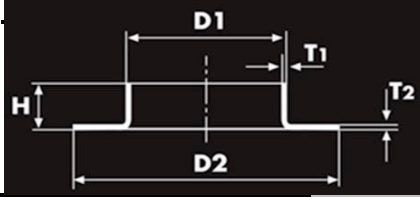

Metric Pressed collars design  
 pressure PN10-16 EN1092-1  
 Type 37

DN	D1	T1	T2	D2	H	weight kgs	Bar WP-Design Pressure	AISI 304L	AISI 316L
15	20	2	3	45	9	0.03	16	*	20830
25	28	2	3	68	12	0.08	16	*	20831
32	38	2	3	78	14	0.1	16	*	20832
40	44.5	2	2	90	17	0.15	16	*	20833
50	54	2	3	102	18	0.23	16	20898	20834
65	69	2	3	122	20	0.2	16	20899	20835
80	84	2	3	138	24	0.328	16	20900	20836
100	106	3.2	4	158	27	0.52	16	20901	20837
125	131	3	4	188	27	0.69	16	20902	20838
150	158	3	4	212	27	1	16	20903	20839
200	208	3	4	268	26	1.1	10	20904	20840
250	256	3	4	320	65	1.9	16	20905	20842
300	306	3	4	370	55	2	16	20906	20844
350	356	3	4	430	55	2.5	16	20907	20846
400	408	4	5	482	40	3.3	16	20908	20847

\*\* Produced from EN1008-2 flat rolled

\*\* manufactured in accordance with Design code EN13480-3 and pressure directive (PED 97/23/EC)

\*\* For use with backing flanges

\*\* We cannot guarantee the pressure values listed as they are for general information and to be used as a guide only.

**\*\*IMPORTANT:**The pressure values indicated are as a GUIDE only, and Neumo UK Ltd accept no liability to any loss or damage caused by using this information.